


# specifications

- The Extended Latch-Valve Assembly shall accommodate up to 1 1/4" wall thickness.
- A large color coded Front plate shall be used for ease of gas identification and aesthetic appeal.
- Extended Latch-Valve Assemblies are available for Ohmeda Compatible, DISS, Puritan-Bennet Compatible, Chemetron Compatible and Oxequip Compatible Outlets.
- All Extended Latch-Valve Assemblies shall be cleaned and degreased for medical gas service, factory assembled and tested.
- Flow rate exceeds the requirements of NFPA and CSA.
- Extended Latch-Valve Assemblies are UL Listed and CSA approved.
- Amico products comply with NFPA-99.



**FRONT**

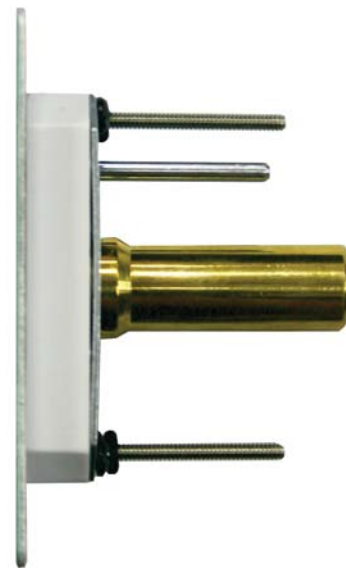

**SIDE**

**project**


---



---



---

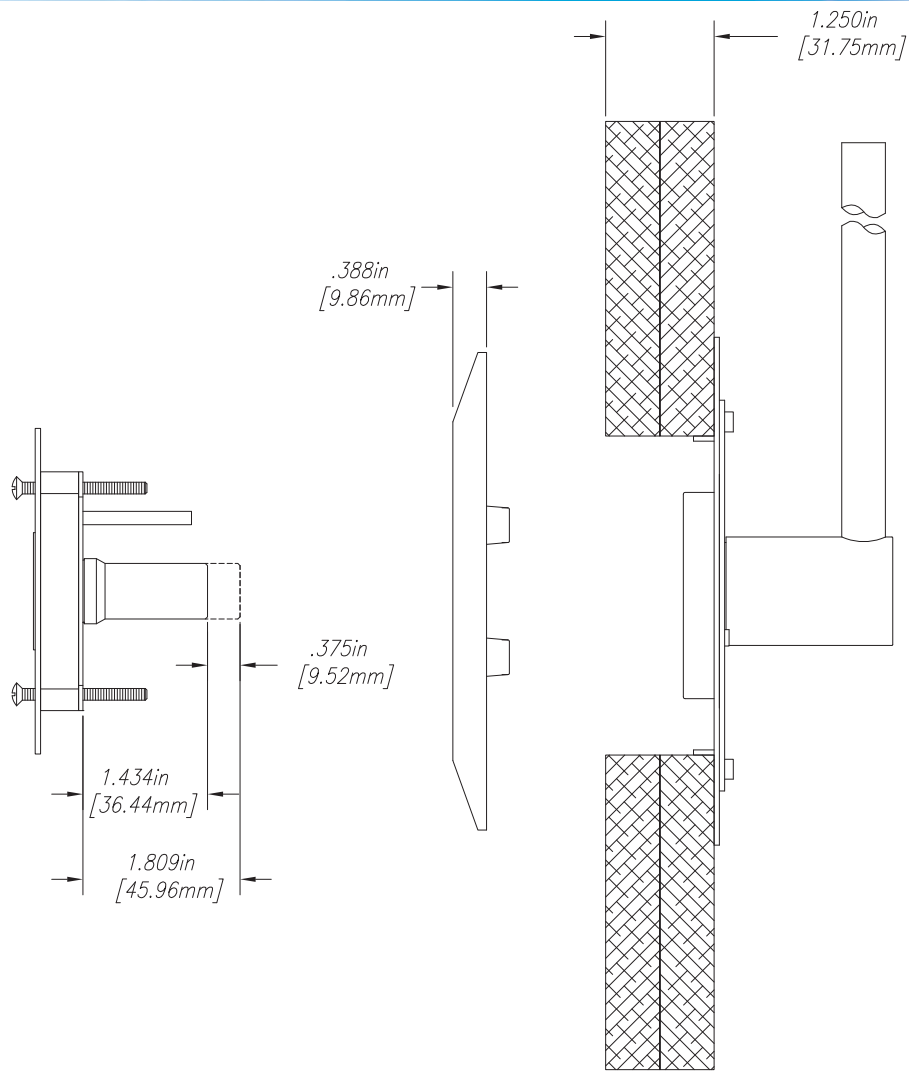

The XX defines the latch-valve assembly style:

- QD = Ohmeda Compatible
- CH = Chemetron Compatible
- PB = Puritan-Bennett Compatible
- DI = DISS (Oxy, Air, Vac & N2O)
- OX = Oxequip Compatible

**O-FASE-XX-L-XXX**

The L defines the Language:

- U = English (NFPA)  
Oxy, Air, Vac & WAG
- E = English (CSA/ISO)
- F = French (CSA/ISO)
- S = Spanish (NFPA)

## model numbers

The XXX defines the Gas:

- Oxygen = OXY
- Medical Air = AIR
- Nitrous Oxide = N2O
- Nitrogen (DISS only) = NIT
- Carbon Dioxide = CO2
- MedVac = VAC
- Waste Anesthetic Gas Disposal (NFPA) = WAG
- Anesthetic Gas Scavenging System (CSA) = AGS

represented by: